


LS型手动单梁起重机 LS Type Manual Single Beam Crane

外形尺寸图: Outer size Diagram

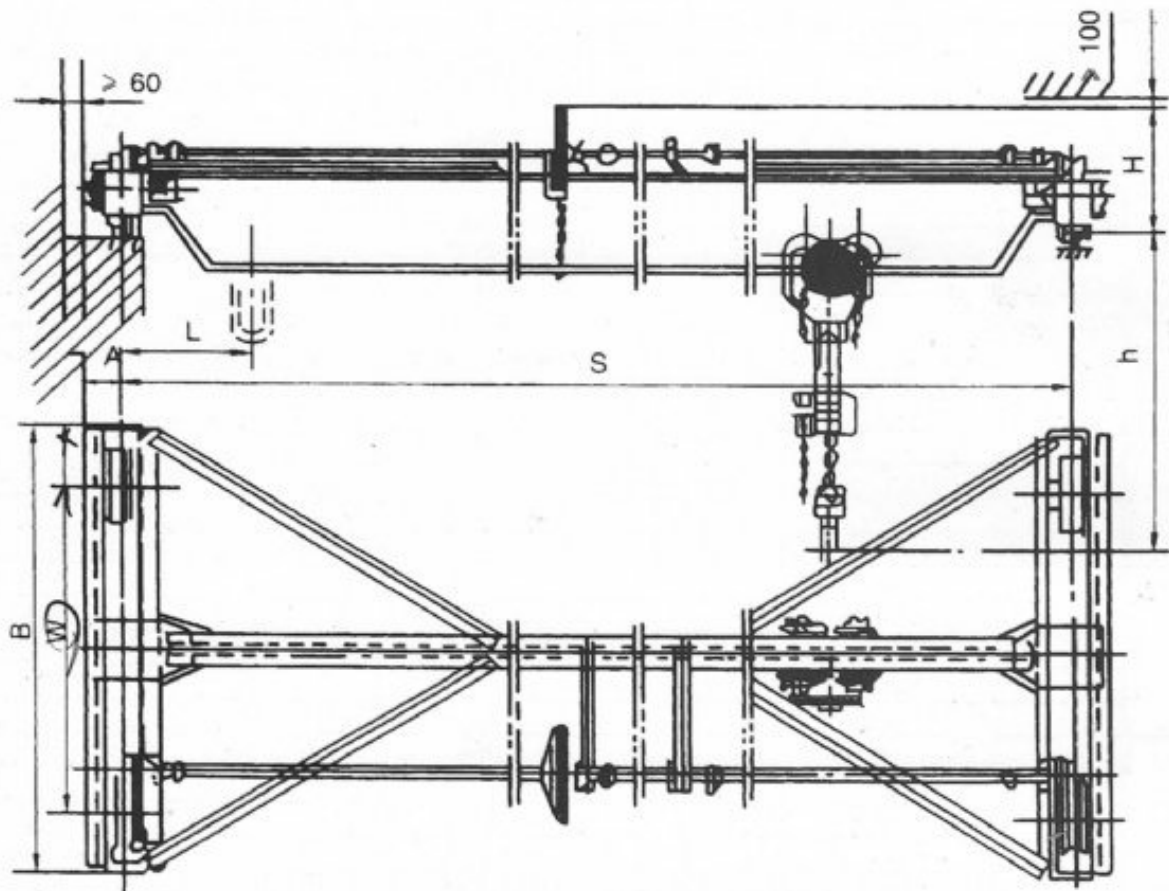

LS型手动单梁起重机用于搬运量不大, 且不甚讲究效率和速度的无电源仓库、车间或检修设计等处。

It is mainly used in on power warehouse, working shop and equpment repair places where there is not enough transortion, efficeience and speed.

技术参数: Technological parameter

起重量(t)lifting weight	1	2	3	5	10
起升高度(m)lifting height	3-10				
工作制度classification group	A3				
轨道面宽(mm)track surface width	37-70				

LS Type Manual Single Beam Crane

技术参数: Technological parameter

起重量 Lifting weight	跨度 Span S	基本尺寸 Basic size				吊钩极限尺寸 hook limit size		牵引力 pulling force			车轮直径 wheel diameter	最大轮压 Crane wheel Load	总重 total weight
		W	B	H	A	h	L	起升 lift	小车 crab	大车 crane			
		(mm)						kg					
1	5	1200	1800	520		550	360	21	6	9.4	350	0.65	0.65
	6											0.67	0.69
	7											0.70	0.76
	8											0.72	0.81
	9											0.73	0.85
	10	1600	2200			580	380	0.76	0.94				
	11							0.79	1.01				
	12							0.81	1.09				
	13							0.85	1.25				
	14							0.86	1.31				
2	5	1200	1800	520	145	720	400	32.5	12	13.4		1.10	0.70
	6											1.13	0.74
	7											1.17	0.82
	8											1.19	0.87
	9											1.23	1.00
	10	1600	2200			790	440	1.26	1.06				
	11							1.29	1.16				
	12							1.33	1.32				
	13							1.38	1.48				
	14							1.40	1.55				
3	5	1200	1800	520		900	460	34.5	14	19.5	1.61	0.81	
	6										1.64	0.87	
	7										1.70	0.98	
	8										1.72	1.05	
	9										1.76	1.13	
	10	1600	2200			940	485	1.79	1.20				
	11							1.84	1.39				
	12							1.87	1.46				
	13							1.94	1.72				
	14							1.97	1.80				
5	5	1200	1800	600	150	1210	520	37.5	20	20	2.50	0.96	
	6										2.57	1.03	
	7										2.65	1.19	
	8										2.70	1.28	
	9										2.75	1.36	
	10	1600	2200			1250	560	2.81	1.60				
	11							2.86	1.73				
	12							2.95	1.89				
	13							2.98	2.09				
	14							3.01	2.21				
10	5	1800	2600	720	160	1390	555	40	25	20	4.89	1.42	
	6										5.01	1.49	
	7										5.14	1.68	
	8										5.21	1.77	
	9										5.29	1.87	
	10	1800	2600	720	160	1440	585	5.38	2.09				
	11							5.44	2.25				
	12							5.50	2.38				
	13							5.60	2.57				
	14							5.65	2.83				