


电磁桥式起重机 (5~16t)

Overhead Travelling Crane With Magnet (5~16t)

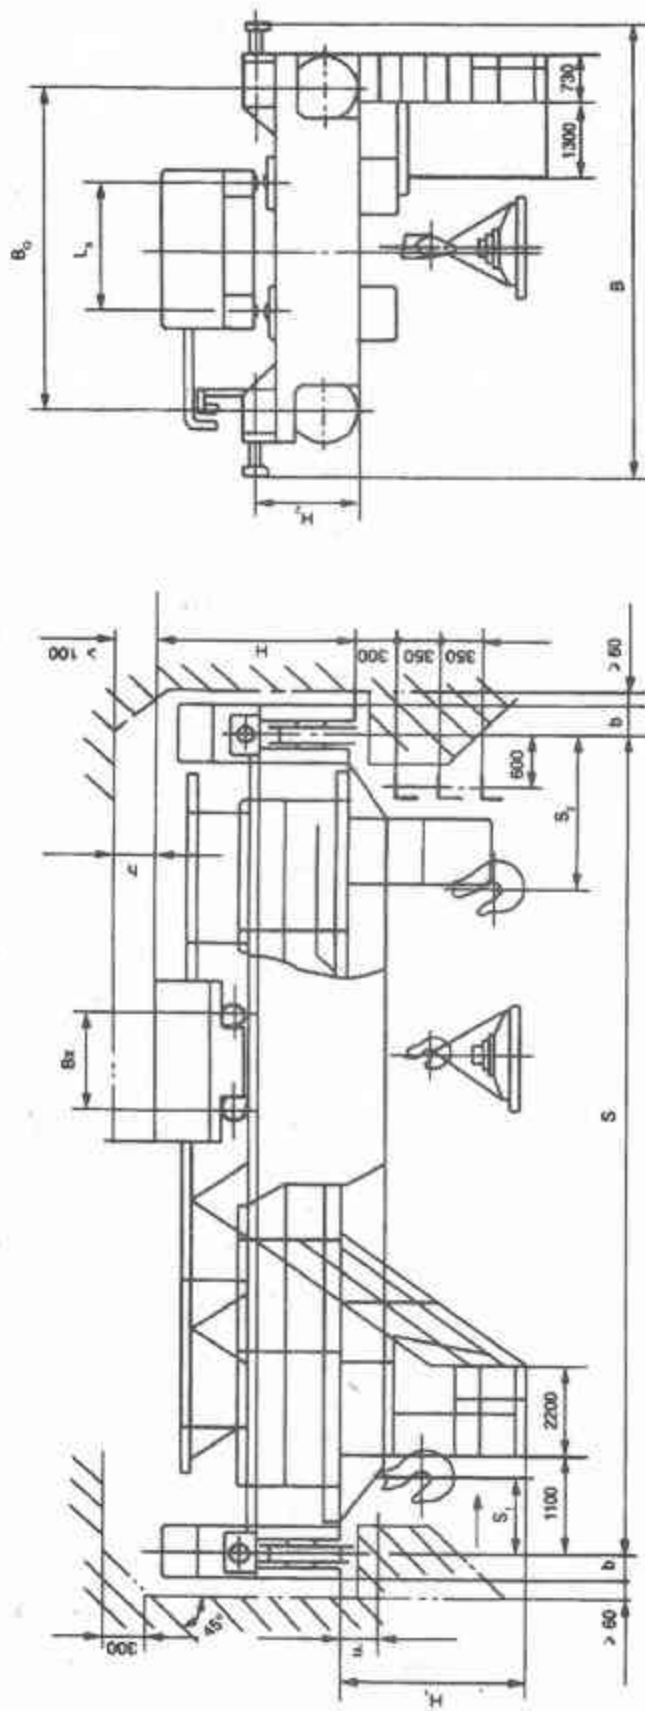

注:

1、进入操纵室的走台门位置为: 端面、侧面、顶面。

2、起重量包括电磁盘自重。

3、使用电磁盘时, 必须将吊钩旋转部用螺钉锁紧, 不允许转动。

4、起重机总重不包含电磁吸盘及附件重量。

5、表中所列电磁吸盘为参考型号, 吸重为该型电磁吸盘的最大吸重能力, 用户可根据实际需要另外选取。

Note:

(1) The direction doorway door access to the cabin is side, end and top.

(2) The lifting capacity includes the dead weight of magnet.

(3) When make use of magnet, the rotary parts of the hook must be tightly locked with screws and no rotating is allowed.

(4) the weight of the crane does not contain electromagnetic sucker and weight of attachment.


(5) list of electromagnetic sucker for reference types, suction weight for this type of electromagnetic sucker maximum weight sucking ability, the user can according to the actual need in addition to select.

Overhead Travelling Crane With Magnet (5~16t)

起重量 Lifting Weight		1	5								10								16																																																																																																																																																																														
工作级别 Classification group			A6																																																																																																																																																																																														
跨度 Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5																																																																																																																																																																							
起升高度 Max. Lifting Height		m	16								22								16																																																																																																																																																																														
速度 Speed	起升 Lift	电磁 electromagnetic	19.9								19.4								16.7																																																																																																																																																																														
		副钩 secondary Hook																																																																																																																																																																																															
	小车运行 crane travel		44								44.6								44.6																																																																																																																																																																														
	大车运行 crane travel		115.6				116.8				115.6				116.8				112.5				101.4																																																																																																																																																																										
电动机 Motor	起升 Lift	电磁 electromagnetic	YZR200L-6/22								YZR250M ₁ -6/37								YZR280S-6/55																																																																																																																																																																														
		副钩 secondary Hook																																																																																																																																																																																															
	小车运行 crane travel		YZR132M ₁ -6/2.2								YZR132M ₁ -6/2.2								YZR132M ₂ -6/3.7																																																																																																																																																																														
	大车运行 crane travel		YZR160M ₁ -6/5.5×2				YZR160M ₁ -6/7.5×2				YZR160M ₁ -6/5.5×2				YZR160M ₂ -6/7.5×2				YZR160L-6/11×2																																																																																																																																																																														
主要尺寸 (mm) Main Size			B	5150				5204				6164				5704				5934				6504				6274				7004																																																																																																																																																																	
			B ₁	3400				3550				5000				4050				5000				4400				5000																																																																																																																																																																					
			B ₂	1400								1700								1700																																																																																																																																																																													
			b	230																260																																																																																																																																																																													
			L ₁	1400				1400				2000																																																																																																																																																																																					
			H	1764								1876								1926				2095		2097		2187																																																																																																																																																																					
			H ₁	2526	2546	2596	2756	2906	3056	3206	3356	2526	2546	2596	2756	2906	3096	3156	3306	2576	2572	2552	2622	2770	2920	3070	3220																																																																																																																																																																						
			H ₂	765				800												850				880																																																																																																																																																																									
			S ₁	1250								1500								1900																																																																																																																																																																													
			S ₂	1500																																																																																																																																																																																													
			F	-24	126	226	376	526	676	826	976	-22	126	226	376	526	626	776	926	80	82	162	242	390	540	690	840																																																																																																																																																																						
			h	850								700								700																																																																																																																																																																													
重量 Weight	小车 Horab		2.496								4.662								5.55																																																																																																																																																																														
	总重量 Total Weight		13								14.8								16.7								19.3								21.7								26								29.2								32.2								17.5								19.4								22.3								24.1								26.8								31								34.3								37.3								18.7								20.5								22.8								27.1								29.8								33.9								37.7								41						
最大轮压 Max. Wheel Load			t	7.2	7.9	8.7	9.4	10.4	11.4	12.2	13.4	11.5	12.2	12.9	13.8	14.5	15.7	16.4	17.3	14.3	15.3	16.2	17.3	18.4	19.4	20.4	21.3																																																																																																																																																																						
电磁盘 Magnetic plate	型号 Mode		MW ₁ -6				MW ₁ -16				MW ₁ -16								MW ₁ -16																																																																																																																																																																														
	吸重 Pulling weight		4540				3330				8330								14330																																																																																																																																																																														
	自重 Dead weight		460				1670				1670								1670																																																																																																																																																																														
	直径 Diameter		776				1180				1180								1180																																																																																																																																																																														
专用钢轨 Steel track			38kg/m								43kg/m								43kg/m QU70																																																																																																																																																																														
电源 Power Supply			三相交流 3-Phase A.C. 50Hz 380V																																																																																																																																																																																														

电磁桥式起重机 (16/3.2~32/5t)

Overhead Travelling Crane With Main Hook—Magnet (16/3.2~32/5t)

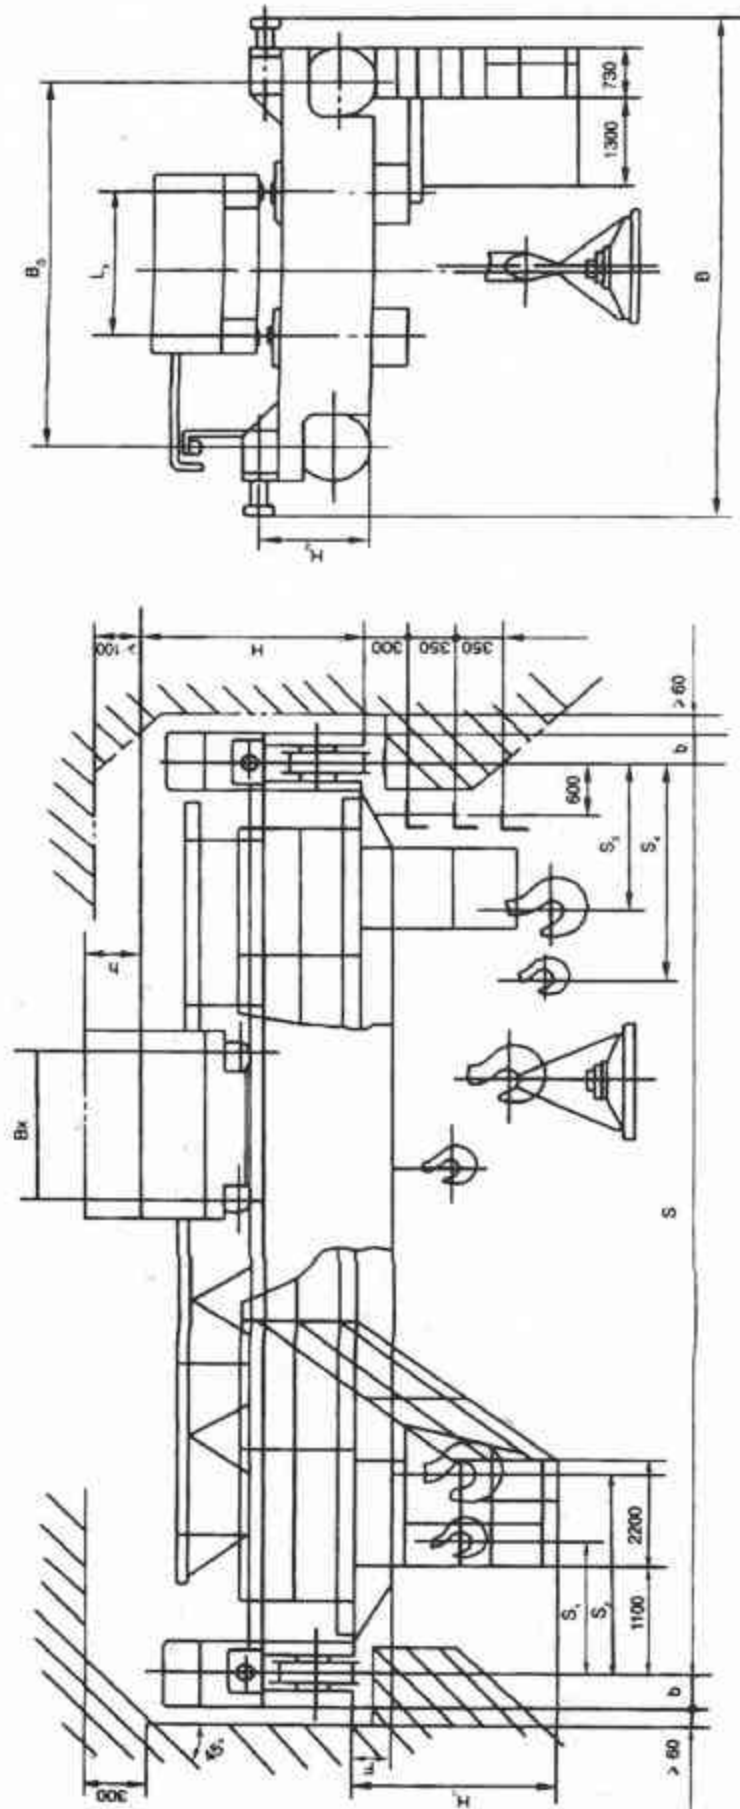

注:

- 1、进入操纵室的走台门位置为:端面、侧面、顶面。
- 2、起重量包括电磁盘自重。
- 3、使用电磁盘时,必须将吊钩旋转部用螺钉锁紧,不允许转动。

4、起重总重不包括电磁盘及其附件重量。

5、表中所列电磁盘为参考型号,吸重为该型电磁吸盘的最大吸重能力,用户可根据实际使用情况另外选定。

Note:

- (1) The direction walkway door access to the cabin is: side, end and top.
- (2) The lifting capacity includes the dead weight of magnet.
- (3) When make use of magnet, the rotary parts of the hook must be tightly locked with screws and no rotating is allowed.

(4) lifting the weight does not include electric disk and its weight of attachment.


(5) list of electric disk for reference types, suction weight for this type of electromagnetic sucker maximum weight sucking ability, according to the actual users can use the other selected.

Overhead Travelling Crane With Main Hook—Magnet (16/3.2~32/5t)

起重量 Lifting Weight		t	16/3.2(主钩电磁) Main electromagnetism								20/5(主钩电磁) Main electromagnetism								20/5(副钩电磁) Secondary electromagnetism								
工作级别 Classification group			A6																								
跨度 Span			m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
最大起升高度 Max.Lifting Height			m	16/18								16/18															
速度 Speed	起升 Lift	主钩 Pinhook	m/min	16.7								14.4								12.4							
		副钩 secondary Hook		19.7								19.7								19.8							
	小车运行 crane travel			44.6								44.6															
	大车运行 crane travel			112.5				101.4				112.5				101.4				112.5				101.4			
电动机 Motor	起升 Lift	主钩 Pinhook	type/kw	YZR280S-6/55								YZR280M ₂ -8/55								YZR250M ₂ -6/45							
		副钩 secondary Hook		YZR160L-6/13								YZR180L-6/17								YZR200L-6/22							
	小车运行 crane travel			YZR132M ₂ -6/3.7																							
	大车运行 crane travel			YZR160M ₂ -6/7.5×2				YZR160L-6/11×2				YZR160M ₂ -6/7.5×2				YZR160L-6/11×2				YZR160M ₂ -6/7.5×2				YZR160L-6/11×2			
主要尺寸 (mm) Main Size			B	6274				7004				6774				7044				6744				7044			
			B ₀	4400				5000				4900				5000				4900				5000			
			B ₂	2935								2950															
			b	230				260				230				250				230				260			
			L ₀	2000								2500															
			H	2095	2097	2187				2094	2098	2186	2188				2094	2096	2186	2188							
			H ₁	2570	2572	2552	2622	2770	2820	3070	3220	2572	2574	2554	2626	2774	2824	3041	3174	2570	2772	2554	2626	2774	2824	3074	3174
			H ₂	790				880				790				880				790				880			
			S ₁	1250								1250															
			S ₂	2650								2650															
			S ₃	1700								1700															
			S ₄	3100								3100															
			F	80	82	182	242	390	540	690	840	82	84	182	244	394	544	694	844	82	84	184	244	394	544	694	844
			h	700								820															
重量 Weight	小车 Hicrab		t	7.146								9.379								8.19							
总重量 Total Weight		20.4		22.3	24.6	28.9	31.6	35.7	39.4	42.8	24.2	26.2	28.9	33.6	36.5	40.6	44.2	48.1	23	25	27.7	32.4	35.3	39.4	43	46.9	
最大轮压 Max.Wheel Load				14.8	15.9	16.8	18	19	20.1	20.9	21.5	17.3	18.3	19.6	21	21.8	23	23.8	25.1	17.3	18.3	19.6	21	21.8	23	23.8	25.1
电磁盘 Magnetic plate	型号 Mode			MW ₁ -16								MW ₁ -45				MW ₁ -45				MW ₁ -45				MW ₁ -45			
	自重 Pulling weight		Kg	14330								18330				14450				4540				3330			
	自重 Dead weight			1670								1670				5550				460				1670			
	直径 Diameter		mm	1180								1180				1650				770				1180			
專用鋼軌 Steel track				43kg/m QU70																							
電源 Power Supply				三相交流 3-Phase A.C. 50Hz 380V																							

副钩电磁桥式起重机 (16/3.2~32/5t)

Overhead Travelling Crane With Secondary Hook-Magnet (16/3.2~32/5t)

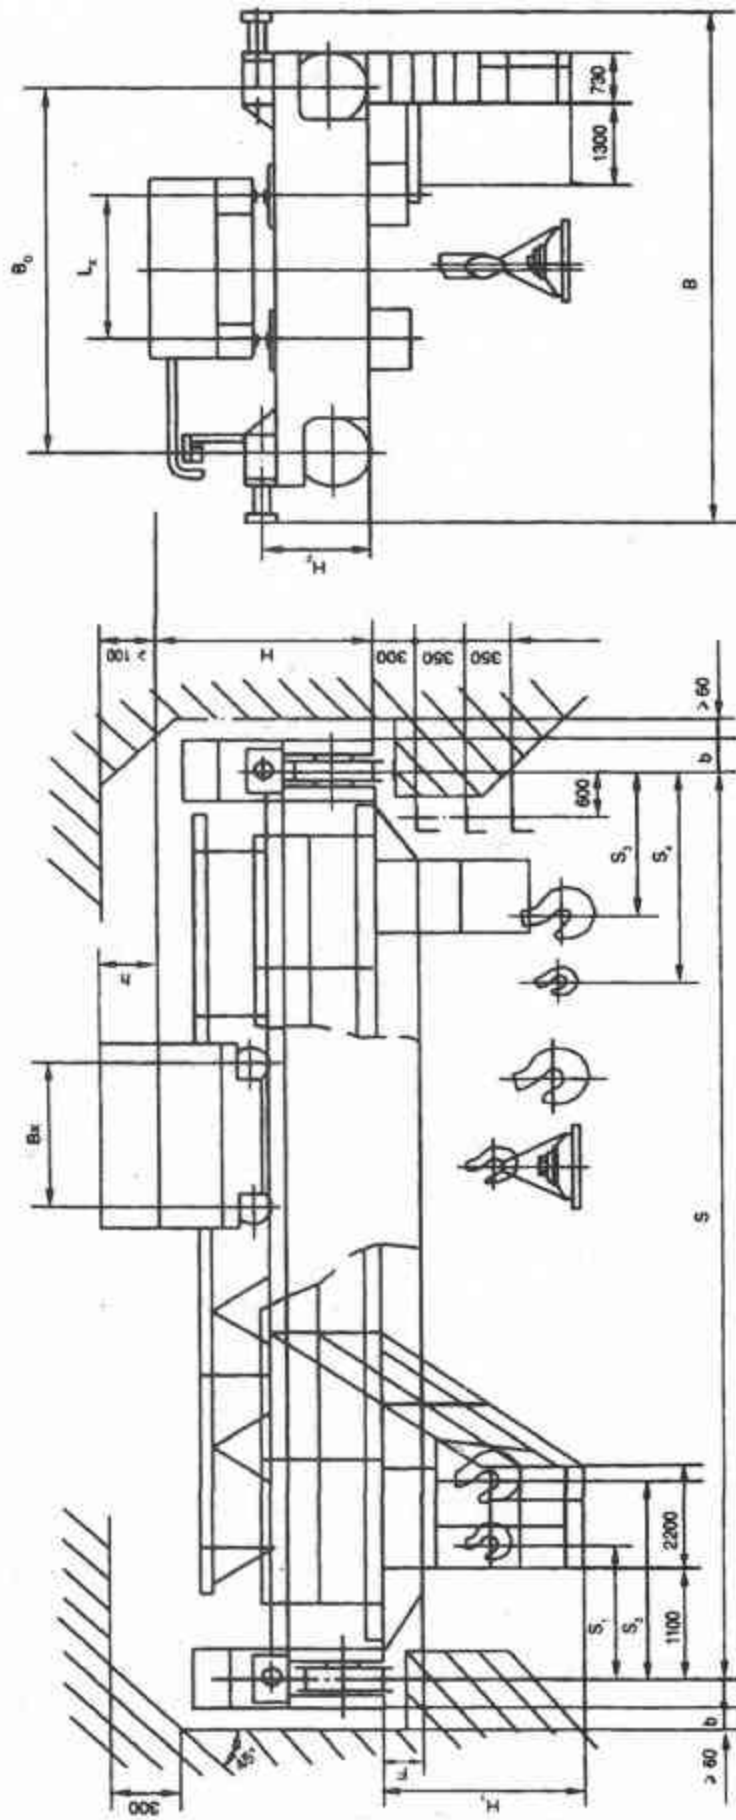

注:

1、进入操纵室的走台门向位置为:端面、侧面、顶面。

2、起重重量包括电磁盘自重。

3、使用电磁盘时,必须将吊钩旋转部用螺钉锁紧,不允许转动。

4、起重总重不包括电磁盘及其附件重量。

5、表中所列电磁盘为参考型号,吸重为该型电磁吸盘的最大吸重能力,用户可根据实际使用情况另外选定。

Note:

(1)The direction walkway door access to the cabin is:side, end and top.

(2)The lifting capacity includes the dead weight of magnet.

(3)When make use of magnet, the rotary parts of the hook must be tightly locked with screws and no rotating is allowed.

(4)lifting the weight does not include electric disk and its weight of attachment.

(5)list of electric disk for reference types, suction weight for this type of electromagnetic sucker maximum weight sucking ability, according to the actual users can use the other selected.

Overhead Travelling Crane With Main Hook—Magnet(16/3.2~32/5t)

Overhead Travelling Crane With Main Hook—Magnet(16/3.2~32/5t)

技术参数: Technological parameter

起重量 Lifting Weight			t	32/5(主钩电磁) Main electromagnetism								32/5(副钩电磁) Secondary electromagnetism															
工作级别 Classification group				A6																							
跨度 Span			m	13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5										
最大起升高度 Max.Lifting Height			m	16/20								16/18															
速度 Speed	起升 Lift	主钩 Pinnhook	m/min	12-1								9.5															
		副钩 secondary Hook		19.7								19.8															
	小车运行 crane travel			42.8																							
	大车运行 crane travel			101.4				101.8				85.8				101.4				101.8				85.8			
电动机 Motor	起升 Lift	主钩 Pinnhook	type/kw	YZR315S-8/75								YZR280M-8/55															
		副钩 secondary Hook		YZR180L-6/17								YZR200L-6/22															
	小车运行 crane travel			YZR160M,-6/5.5																							
	大车运行 crane travel			YZR160L-6/11x2				YZR180L-8/11x2				YZR160L-6/11x2				YZR180L-8/11x2											
主要尺寸 (mm) Main Size			B	6574				6744				7044				6574				6744				7044			
			B ₀	4650				4700				5000				4650				4700				5000			
			B ₁	3350																							
			b	260				300				260				300											
			L ₀	2500																							
			H	2341				2471				2341				2471											
			H ₁	2586	2616	2646	2796	2946	3096	3196	2586	2616	2646	2796	2946	3096	3196										
			H ₂	880				1010				880				1010											
			S ₁	1250																							
			S ₂	2670																							
			S ₃	1700																							
			S ₄	3120																							
			F	96	246	266	416	566	716	816	96	246	266	416	566	716	816										
			h	820																							
重量 Weight	小车 Horizontal		t	11.754																							
总重量 Total Weight		31		37.2	39.5	42.9	48.3	51.9	56.7	30.1	33.2	38.3	41.5	46.8	50.3	54.9											
最大轮压 Max.Wheel Load				26.3	27.8	28.9	30.1	31.6	32.7	34	26.3	27.8	28.9	30.1	31.6	32.7	34										
电磁盘 Magnetic plate	型号 Mode			MW ₁ -16				MW ₂ -45				MW ₃ -6				MW ₄ -16											
	吸重 Pulling weight		Kg	16000								26450								4540				3330			
	自重 Dead weight			1670								5550								460				1670			
	直径 Diameter		mm	1180								1650								776				1180			
專用鋼軌 Steel track																											
电源 Power Supply																											