


U型10-50/10吨双主梁门式起重机

TypeU 10-50/10Tons double-girder portal bridge crane

外形尺寸图: Outer size Diagram

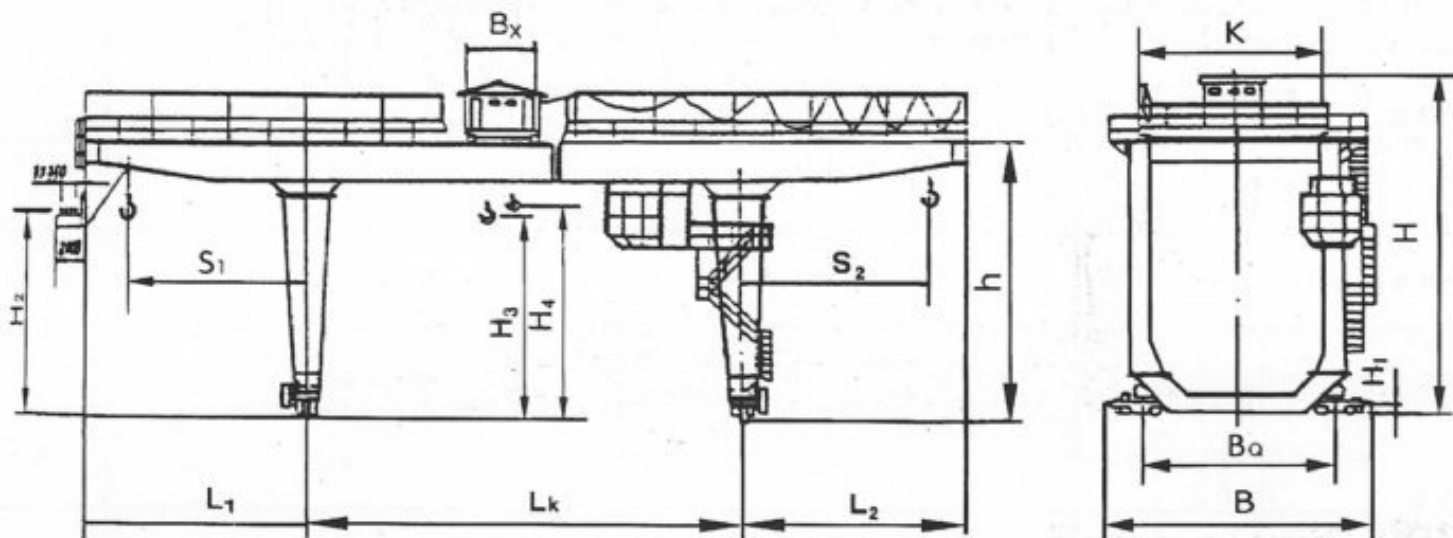

本机适用于大跨度、装卸作业净频繁的铁路货场、港口、露天仓库、集装箱中装站等。
 本机采用u型门架式，其过腿净空大（近7m），适用于长大笨重货物和集装箱装卸作业。
 本机导电形式有滑线和电缆两类，优先推荐滑触线形式、订货（或设计）时应明确导电形式和位置。

技术参数: Technological parameter

t	10					16			20/10					32/10		30/16				50/16
LK(M)	18	22	26	30	35	18	22	30	18	22	26	30	35	22	26	22	26	30	35	22
H	14440		14740	14690		14660			14560	14660	14550	15360		16000		16260				17160
H ₁	1000					1000			1100					1100		1100				1350
H ₂	9400					8400		11000	9400					10000		11000				11260
H ₃	11500					10500—12000			10500					11500		11500				12000
H ₄									11000					12000		12000				13000
h	12000		12300	12250		12000		13205	12000	12100	12000	12622	12800	13200		13300				14200
L ₁	8750		9750	10500	11500	8000	9000	9500	8000	9000	9500		9500		10500				14000	
L ₂	8750		9750	10500	11500	8000	9000	9500	8000	9000	9500		9500		10500				14000	
S ₁	6500		7500	8000	9000	5500	6500	7500	5500	6500	7000		7000		7500				11000	
S ₂	6500		7500	8000	9000	5500	6500	7500	5500	6500	7000		7000		7500				11000	
B	11240		12530	11990		10820	11990		11800	11990		11750		11750		11040				12920
B ₀	9150		9230	8500		9500	8500		9500	8500		8010		8010		8210				8210
K	7000					7000			7000					7000		7000				7000
B _x	2100					2100			2600					2600		2600				3100

TypeU 10-50/10Tons double-girder portal bridge crane

TypeU 10-50/10Tons double-girder portal bridge crane

技术参数: Technological parameter

起重量 Lifting Weight		主 Main 副 Aux	t	10						16			20/10					32/10		36/16				50/10	
跨度 Span				18	22	26	30	35	18	22	30	18	22	26	30	35	22	26	22	26	30	35	32		
起升高度 (m) lifting H.	主 Main		m	11.5					10		11	10.5				11.5		11.5				12			
	副 Aux											11				12		12				13			
工作制度 Classification group				A5					A ₅ -A ₆			A5					A ₅ -A ₆				A ₅ -A ₆				
速度 Speed	起升 Lift	主 Main	m/min	18.4					12.3			9.2				10.4		10.4				6			
		副 Aux										18.4				18.4		12.3				18			
	大车运行 crad travel			43.8					44.5			44.5				41.9		51				38.13			
	小车运行 crad travel			54.6		48.4			51.2		49.1	51.2		48	51.2	51.2		51.2				43.8			
电动机 Motor	起升 Lift	主 Main	type/ kw	YZR250M ₁ -8/30					YZR250M ₁ -8/30			YZR250M ₁ -8/30				YZR280M ₁ -10/45		YZR315S-10/55				YZR315S-10/55			
		副 Aux										YZR250M ₁ -6/3.7x2				YZR250M ₁ -8/30		YZR250M ₁ -8/30				YZR250M ₁ -8/30			
	大车运行 crad travel			YZR132M ₁ -6/2.2x2					YZR132M ₂ - 6/3.7x2			YZR132M ₂ -6/3.7x2				YZR132M ₁ - 6/3.7x2		YZR160M ₁ - 6/5.5x2				YZR132M ₂ - 6/5.5x2			
	小车运行 crad travel			YZR160L-8/11x2		YZR200L-8/15x2			YZR200L- 8/15x2			YZR200L-8/15x2				YZR200L-8/15x2		YZR180L-8/11x4				YZR180L- 8/11x4			
重量 Weight	大车 Crane		t	9					9.5			12				16		18				24			
	总重 Total weight			63.2	67.2	84	103	120	78	83.4	106	79	85	99	112	132	125	130	118	132	148	159	204		
最大轮压 Max.Wheel Load			KN	225	235	295	255	285	353	373	255	295	304	245	295	314	324	334	314	334	354	363	295		
荐用钢轨 Steel track				43kg/m									50kg/m												
电源 Power Supply				三相交流 3-phase A.C. 50Hz 380v																					